


## CURRENT SENSOR

---

PRODUCT SERIES: STB-HA/Y

PRODUCT PART NUMBER: STB-HA/Y

VERSION: Ver 1.2

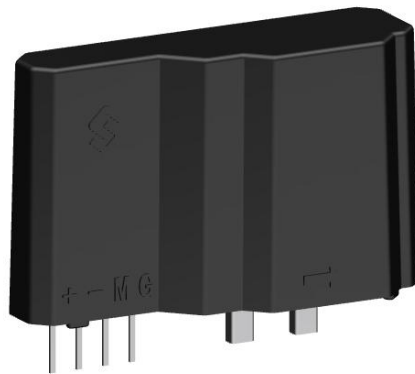

## CONTENT

1. Description.....	2
2. STB-50HA/Y parameters.....	3
3. Frequency band width.....	3
4. Step response time.....	4
5. STB-HA/Y: Dimensions & Pins & Footprint.....	5

## 1. Description

STB-HA/Y series current sensors are based on close loop principle with TMR technology. The sensor can detect those current with DC, AC, pulse and irregular wave shape.

### Typical application

- Variable frequency converter
- Uninterruptible Power Supplies (UPS)
- Solar inverters
- Direct-current dynamo
- Switched model power supplies (SMPS)

### General parameters

Parameter	Symbol	Unit	Value
Working temperature	T <sub>A</sub>	°C	-40 ~ 85
Storage temperature	T <sub>stg</sub>	°C	-40 ~ 105
Mass	m	g	13

### Absolute parameters

Parameters	Symbol	Unit	Value
Supply voltage	V <sub>cc_max</sub>	V	±18
ESD rating (HBM)	U <sub>ESD_HBM</sub>	kV	4

Remark: the unrecoverable damage may occur when the product works on the conditions over the absolute maximum ratings. Long-time working on the absolute maximum ratings may cause the degradation on performance and reliability.

### Electrical data

Primary nominal rms current I <sub>PN</sub> (A)	Primary current measuring rang I <sub>PM</sub> (A)	Primary conductor diameter x turns (mm)	Type
50	±150		STB-HA/Y

## 2. STB-50HA/Y parameters

Condition:  $V_{CC} = \pm 15.0\text{ V}$ ,  $N_P = 1$ ,  $R_L = 10\text{ k}\Omega$ ,  $T_A = 25^\circ\text{C}$ , unless specified.

Parameters	Symbol	Unit	Min.	Typ.	Max.	Remark
Output Voltage	$V_{out}$	V	3.96	4	4.04	All series
Supply Voltage	$V_C$	V		$\pm 15 \pm 5\%$		All series
Current consumption	$I_C$	mA		$18 + I_P * N_P / N_S$		STB-HA/Y $N_S: 1000$
Linearity ( $0 \dots \pm I_{PN}$ )	$\epsilon_L$	% of $I_{PN}$		$\pm 0.5$		All series
Electrical offset voltage	$V_{OE}$	mV	-40	0	40	$I_{PN} = 0\text{ A}$
Thermal drift of offset	$TCV_{OE}$	% of $I_{PN}$		$\pm 1$		All series
Thermal drift of gain	$TCV_O$	% of $I_{PN}$		1.5		All series
Step response time	$t_r$	$\mu\text{s}$		1.5		All series
Frequency bandwidth (-3dB)	BW	kHz		150		All series

## 3. Frequency band width

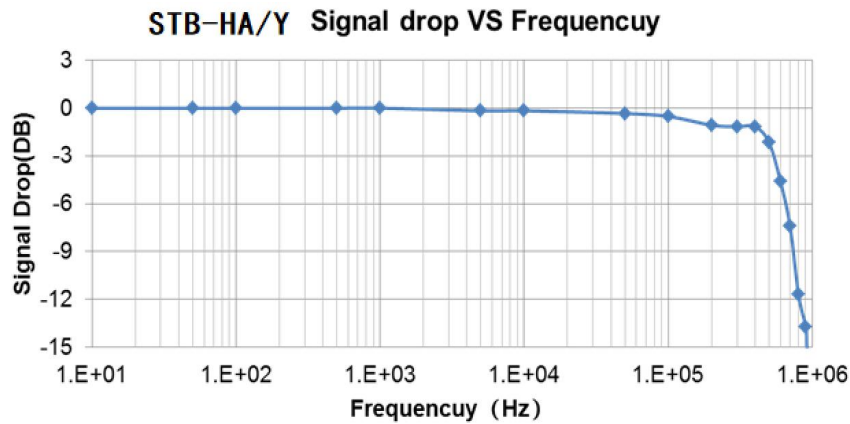


Fig.1 the band width of STB-HA/Y series current sensors.

#### 4. Step response time




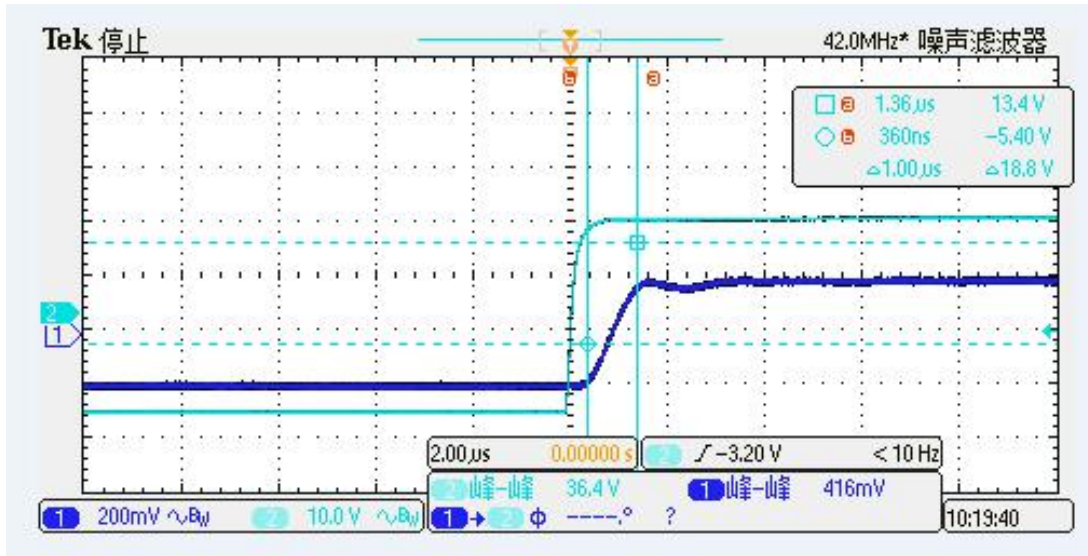



Fig.2 the step response time of STB-HA/Y current sensors. The light blue is primary current, while the dark blue is output signal of current sensor. The step response time is less than 1.5 μs.

## 5. STB-HA/Y: Dimensions & Pins & Footprint

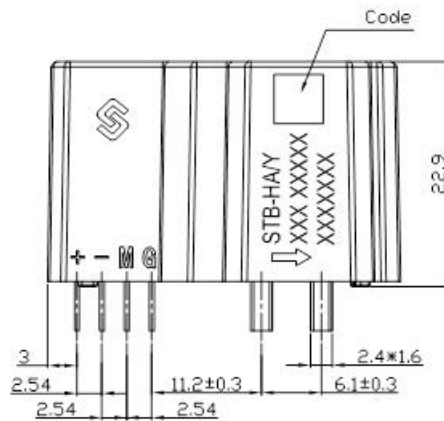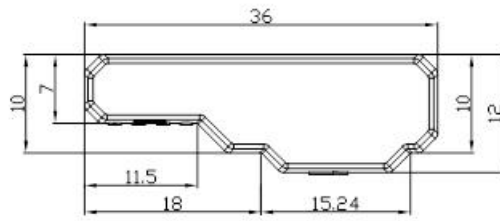

Terminals

(1)	+15V
(2)	-15V
(3)	Output
(4)	0V
(5)	Input current (+)
(6)	Input current (-)

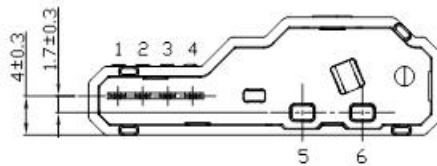

Material : Fit UL94V-0 & RoHS requirements ;  
General tolerance : ±0.5  
Unit :mm

