


U Core

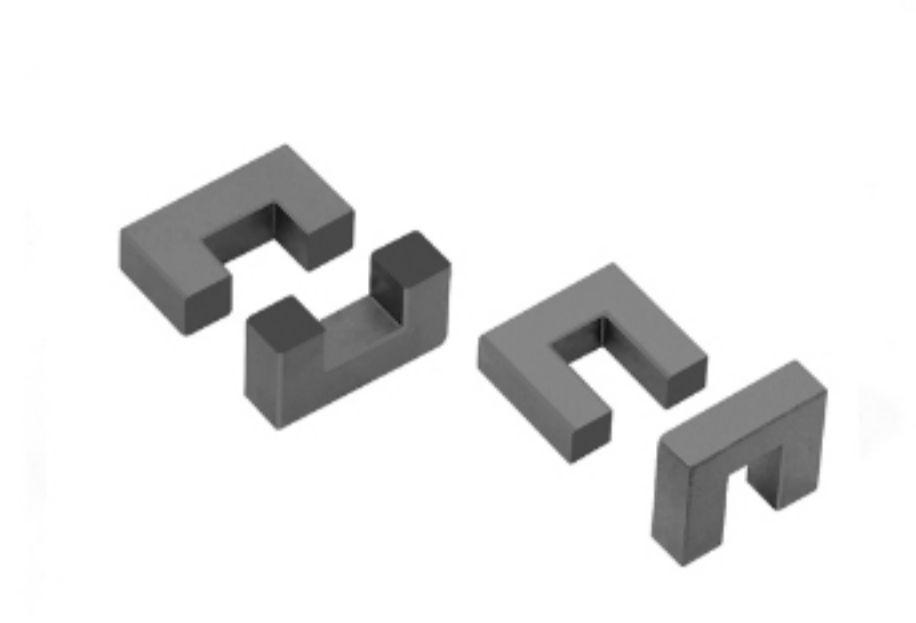

Introduction

本形状为磁路场、截面积最佳化的设计方式，具有与线轴一起使用的优点。

Features


能量存储能力卓越，几乎没有磁束的损失

Applications

主要使用于抗流圈或flyback变压器等。

• Cross Reference

SU 3111 F 060

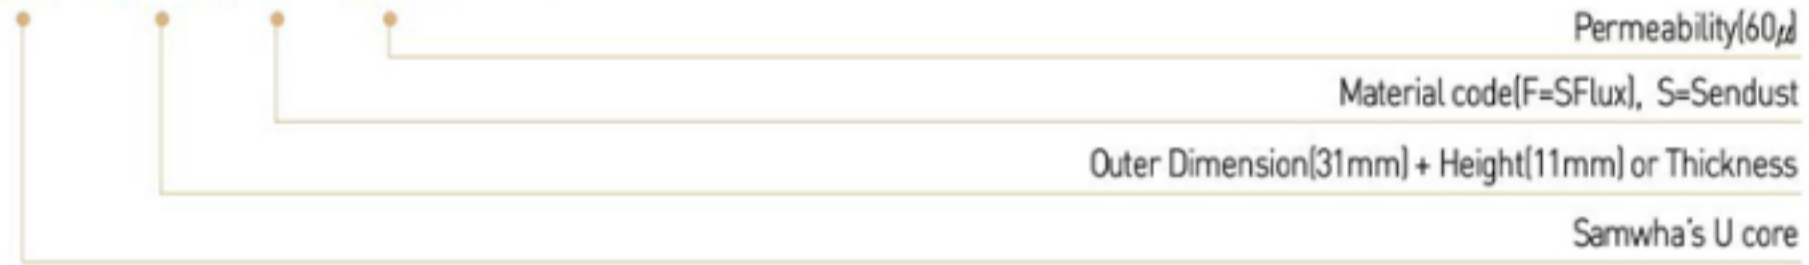

• Cross Table

Part No.	Unit	A	B	C1	C2(norm)	D(min)	D(min)
SU3112	mm	31.2	11.2	12.1	8.26	14.22	2.79
	in	1.23±0.020	0.440±0.010	0.475±0.015	0.325	0.56	0.110
SU4110	mm	40.6	11.2	9.5	8.38	23.88	2.79
	in	1.6±0.020	.440±0.020	.375±0.015	0.33	0.94	0.110
SU4111	mm	40.6	11.2	12.1	8.38	23.88	2.79
	in	1.6±0.020	.440±0.0100	.475±0.015	0.33	0.94	0.110
SU4119	mm	40.6	11.2	19	8.38	23.88	2.79
	in	1.6±0.020	.440±0.010	.750±0.015	0.33	0.94	0.110
SU5527	mm	54.9	27.6	16.3	10.5	33.9	17
	in	2.16±0.0	1.085±0.020	.643±0.012	0.42	1.335	0.65
SU5529	mm	54.9	27.6	23.2	10.5	33.9	17
	in	2.16±0.025	1.085±0.020	.912±0.015	0.42	1.335	0.65
SU6527	mm	65.1	32.5	27	10	44.2	22.2
	in	2.565±0.053	1.28±0.012	1.063±0.016	0.394	1.741	0.874
SU6533	mm	65.1	32.5	20	12.5	40.1	20
	in	2.565±0.053	1.28±0.012	.788±0.016	0.493	1.545	0.764