

FEATURES :

- * 2.9 x 2.9 x 10.3 mm [Rectangular 1025 Size]
- * Time Lag Type : 30T
- * Ceramic Body with Wire-in-Air Design
- * RoHS-Compliant Products


APPROVALS :

- * Recognized under the Component Program of U.L./c-U.L. Guide JDYX2/JDYX8, File No. E195833
- * METI (PSE) Compliant [$\geq 1A$] - pending




30H / 30T SERIES

DIMENSIONS :

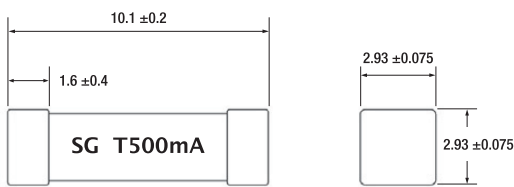


LAND PATTERN :

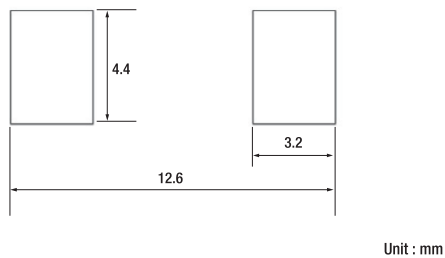

ELECTRICAL CHARACTERISTICS :

% of Ampere Rating	Opening Time
100%	4 hours Min.
250%	1 sec Min. / 120 sec Max.

AVERAGE TIME CURRENT CURVES :

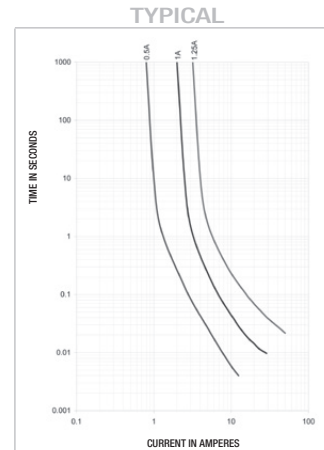

SPECIFICATIONS :

Product Code	Ampere Rating	Voltage Rating AC	Interrupting Rating*1		Typ. [Ω] Resistance Value*2
			250 VAC	600 VAC	
30H/30T 0500	500 mA	250 VAC	50 A	60 A	TBD
30H/30T 1250	1.25 A	250 VAC	50 A	60 A	0.113
30H/30T 2000	2 A	250 VAC	50 A	60 A	TBD

NOTE:

1. AC Interrupting Rating - Measured at rated voltage, Unit Power Factor (100%) Power Factor.
2. Typical Resistance Value - measured with less than 10% of rated current.
3. Operating Current - An operating current of 75% or less of rated current is recommended, with further derating required at elevated ambient temperature.
4. Ask PICO sales for the items not mentioned in this Catalog.
5. Consult PICO sales for the details.