

**FEATURES :**

- \* Time-Lag Type
- \* Radial Lead Micro Fuse
- \* RoHS-Compliant Products


**APPROVALS :**

- \* METI (PSE) (1-6.3A)
- \* UL Recognized (US/Canada)



## SCH SERIES

**DIMENSIONS :**

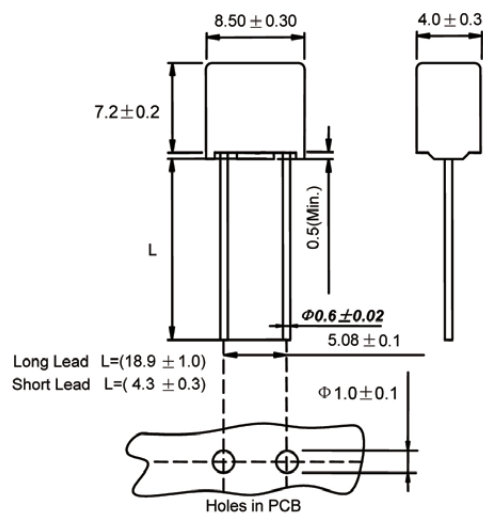


Unit : mm

**ELECTRICAL CHARACTERISTICS :**

% of Ampere Rating	Opening Time
150%	1 hours Min.
210%	120 sec Max.
275%	400m sec Min. / 10 sec Max.
400%	150m sec Min. / 3 sec Max.
1000%	20m sec Min. / 150m sec Max.

**AVERAGE TIME CURRENT CURVES**

TYPICAL

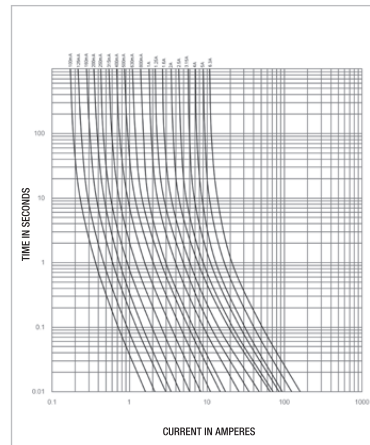

**SPECIFICATIONS :**

Product Code	Ampere Rating	Voltage Rating AC	Voltage Drop Max (mV)	Breaking Capacity	Typical Melting I <sup>2</sup> t (A <sup>2</sup> sec)
SCH 1 A	1 A	300 V	140	100 A	6.619
SCH 1.25 A	1.25 A	300 V	130	100 A	12.23
SCH 1.6 A	1.6 A	300 V	120	100 A	22.03
SCH 2 A	2 A	300 V	100	100 A	43.08
SCH 2.5 A	2.5 A	300 V	100	100 A	50.05
SCH 3.15 A	3.15 A	300 V	100	100 A	73.53
SCH 4 A	4 A	300 V	100	100 A	88.16
SCH 5 A	5 A	300 V	100	100 A	152.0
SCH 6.3 A	6.3 A	300 V	100	100 A	255.7

**NOTE:**

1. Ask PICO sales for 7.5mm-pitch Forming in Tape and/or any detailed information.

RADIAL TYPE HIGH VOLTAGE MICRO FUSE