


Schottky Barrier Diode in SOT-23

Features

- Fast Switching Speed
- Surface Mount Package Ideally Suited for Automatic Insertion
- Low Forward Voltage



Mechanical Data

- Case: SOT-23 (plastic package).
 Lead free; RoHS compliant; Halogen free
- Molding Compound Flammability Rating: UL 94 V-0
- **Terminals:** High temperature soldering guaranteed: 260 °C/10 sec. at terminals

Applications

- High Speed Switching and Reverse Polarity Protection
- High Speed Rectifying Applications
- Consumer, Automotive and Telecommunication Industry

Absolute Maximum Ratings

Ratings at 25 °C, ambient temperature unless otherwise specified

Parameter	Symbol	Limit	Unit
Peak repetitive peak reverse voltage	V_{RRM}		
Working peak reverse voltage	V_{RWM}	40	V
DC blocking voltage	V_R		
Forward continuous current	I _{FM}	200	mA
Power dissipation	P _D	200	mW
Thermal resistance junction to ambient	$R_{\theta JA}$	500	°C/W
Junction temperature	TJ	125	$^{\circ}$
Storage temperature range	T _{STG}	-55~+150	$^{\circ}$


Electrical Characteristics


(T_A = 25 °C unless otherwise specified)


Parameter	Symbol	Test conditions	Min	Max	Unit
Reverse breakdown voltage	$V_{(BR)}$	I _R =10µA	40		٧
Reverse voltage leakage current	I _R	V _R =30V		200	nA
Forward voltage	V _F	I _F =1mA I _F =40mA		380 1000	mV
Diode capacitance	C _D	V _R =0,f=1MHz		5	pF
Reverse recovery time	trr	I_{rr} =1mA, I_{R} = I_{F} =10mA R_{L} =100 Ω		5	ns




Typical Characteristics (T_{amb} = 25 °C unless otherwise specified)













Package Dimensions



	DIMENSIONS				
SYMBOL	MILLIN	METER	INCHES		
	MIN	MAX	MIN	MAX	
Α	0.89	1.12	0.035	0.044	
A1	0.01	0.10	0.0006	0.0043	
A2	0.88	1.02	0.035	0.040	
D	2.80	3.04	0.110	0.120	
Е	2.10	2.64	0.082	0.104	
E1	1.20	1.40	0.047	0.055	
е	1.90BSC		0.75 BSC		
L	0.40	0.60	0.015	0.024	
θ	0	8	0	8	

Pad Dimensions

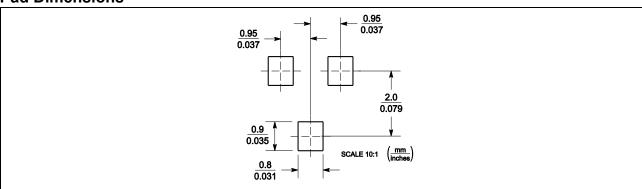

Ordering information

Order code	Package	Packaging option	Base quantity	Packaging specification
BAS40 Series	SOT-23	Tape and reel	3000pcs / reel	EIA STD RS-481

Revision history

Da	ate	Revision	Changes
23-May	/-2012	1.0	Initial release
18-Dec	:2018	2.0	Update

Rev. 2.0 www.crea-tek.com



CAUTION / WARNING

Information in this document is believed to be accurate and reliable. However, CREATEK does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Users should independently evaluate the suitability of and test each product selected for their own applications, and CREATEK assumes no liability whatsoever relating to the choice, selection or use of the CREATEK products and services described herein.

CREATEK reserves the right to change or update, without notice, any information contained in this publication; to change, without notice, the design, construction, processing, or specification of any product; and to discontinue or limit production or distribution of any product.

Information in this document supersedes and replaces all information previously supplied.

Products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an CREATEK product can reasonably be expected to result in personal injury, death or severe property or environmental damage. CREATEK accepts no liability for inclusion and/or use of CREATEK products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

Resale of CREATEK products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by CREATEK for the CREATEK product or service described herein and shall not create or extend in any manner whatsoever, any liability of CREATEK.

CREATEK expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. CREATEK only obligations are those in the CREATEK Standard Terms and Conditions of Sale and in no case will CREATEK be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of its products.

Specifications are subject to change without notice

© Copyright 2009, CREATEK Microelectronics

CREATEK® is a registered trademark of CREATEK Microelectronics

All rights reserved